


Allasportaat - Leveäkaide

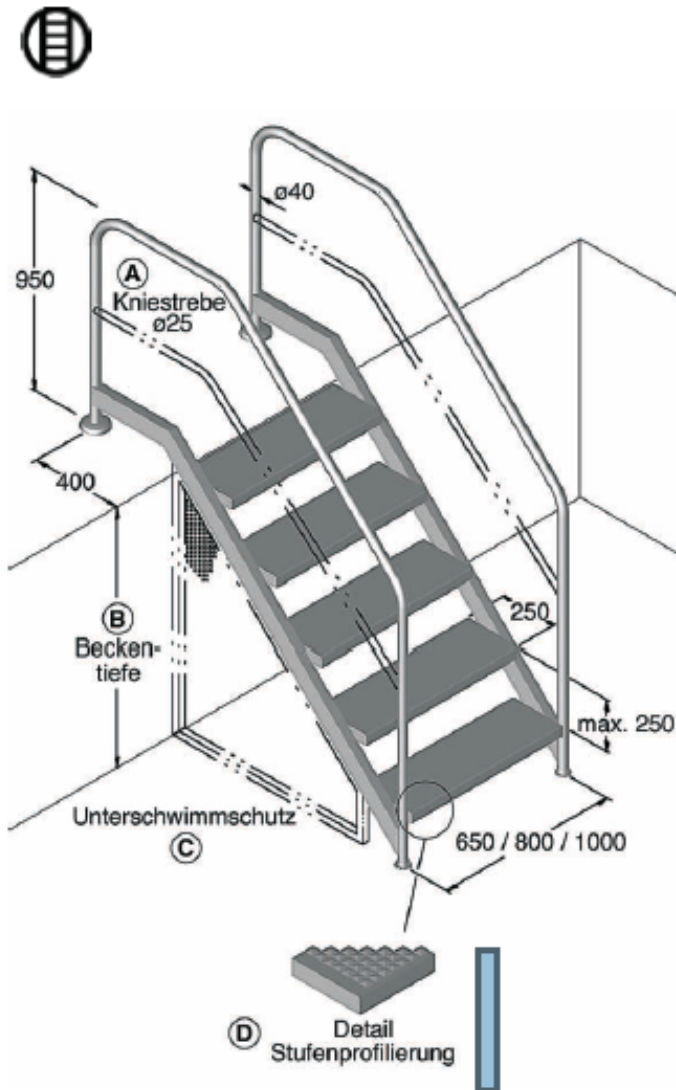

maximum pool depth	overhang inside pool
for 3 steps 690 mm	max 738 mm
for 4 steps 920 mm	max 988 mm
for 5 steps 1150 mm	max 1238 mm
for 6 steps 1380 mm	max 1488 mm
for 7 steps 1610 mm	max 1738 mm
for 8 steps 1840 mm	max 1988 mm
for 9 steps 2070 mm	max 2238 mm

Special Constructions?

No Problem!

Examples see appendix!

• **Field of application:**
private, therapeutic and public pools
(in accordance with German regulation DIN EN 13451-2; a stair width of 1000 is dictated)

Special Construction

• **Description:**
stainless steel *316*, polished, bar ø40,
step bar 80x40,
non-skid g^offered plate steps,
250 deep,
vertical distance between the steps variable,
overhang behind the edge of the pool 400,
height above the pool deck 950,
stairs slanted 38°/41.5°/45°
without/with additional bar ø 25
width 650/800 or bar centerline,
steps and step bars **screwed up**,
... steps, for a pool depth of

construction corresponding to this drawing

• **Fastening:**
flange assembly kit incl. escutcheons to the pool deck, bumpers inside the pool

• **Assembly material:**
is included in the scope of supply,

• **Ordering references:**
model specification, pool depth, number of steps, stairs width

• **Extras:**
assembly in anchor sockets,
additional rail,
handrail on one side only
deviating overhang behind the edge of the pool,
deviating stairs slant,
diving protection

• **Cross reference:**
as an alternative for private pools, **Model 08**
can also be used

- A = additional bar ø25
- B = pool depth
- C = diving protection for staircase
- D = detail step profile

Permissible chlorid-ions for material quality 304 = 150 mg/l; for *316* = 400 mg/l