




Pool-edge Gratings

S31 ANTI SLIP MATS


Principal characteristics

- Moulded in special polyethylene, acid proof, elastic, unbreakable, germs proof, resistant to low temperatures and to rotting, electro and thermo insulating.
- Modular, with elements (25x25 cm.) allowing formation of non-slip floors of any size.
- Strongly non-slip and easily cleanable tread surface
- Tread surface raised 2cm from floor for free flow of liquids (water etc.).
- Ground support level designed with special geometry to prevent mat skidding.
- Connectable on all four sides by means of a special system of pressure and snap hooks.
- Roll-able, thanks to the particular geometry of the permanent connecting system.

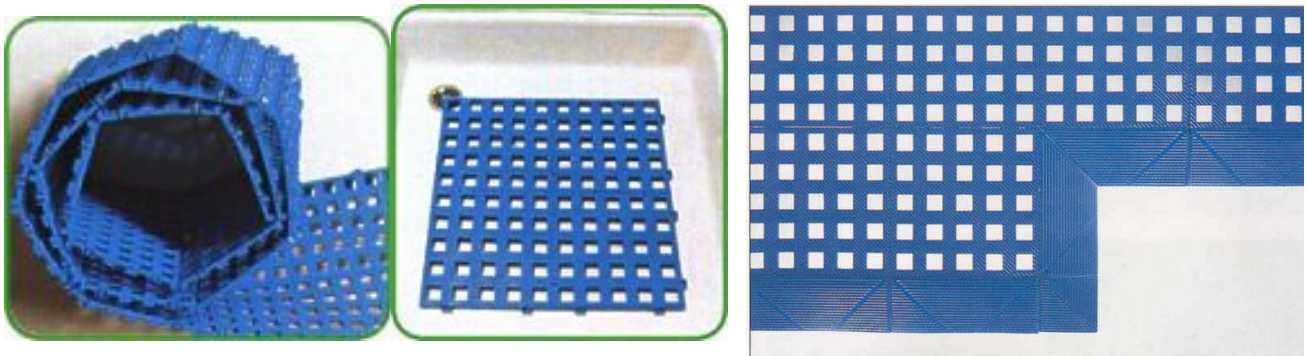

Technical details

- Connectable elements: FLEX can be equipped with additional non-slip elements, which can be easily connected to the perimeter of the FLEX.
- Non-slip surface: Its knurled surface (45°) is easily cleanable.
- Assembly: The elements can be easily connected “coupling groove and tongue” the hook with the ring, keeping the knurling always in one direction.
- Range of colours: FLEX is available in: **blue, brown and black.**

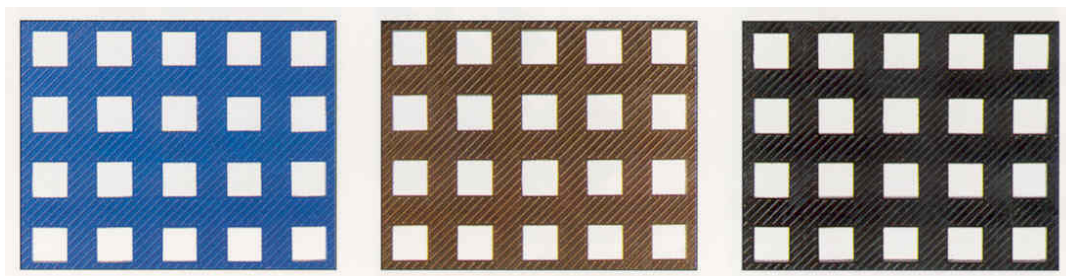**S311 – Mod. FLEX/A**

Mat with squared perforations:

moulded in special polyethylene, with possibility to hook to all 4 edges; dimensions 25x25; thickness 2cm. Note: 1 m² = 16 modules of cm. 25x25

S312 – Mod. FLEX

Sloping element for anti-slip mats Mod. FLEX/A; as connection between floor and mat.

PACKING LIST DETAILS

1 box of cm. 56x56x48 – kg. 34 contains 10 sqm (160 pieces of cm. 25x25)